


## ELECTRICAL FEATURES

INPUT VOLTAGE	100 - 240V Ac, 50-60HZ
INPUT CURRENT	0.68A Max
POWER RATE	150W
DIMMABILITY	NO
POWER FACTOR	0.97
OUTPUT VOLTAGE	12V Dc
OUTPUT CURRENT	12.5A Max
WORKING TEMPERATURE	≤ 70°

## GENERAL FEATURES

1. Protections:
  - (a) Over voltage protected (OVP)    (b) Over temperature protected (OTP)
  - (c) Short-circuit protected (SCP)    (d) Input in-rush current protected (ICP)
2. APFC (Active Power Factor Correction): 0.99
3. Thermal Optimized Aluminum case with built-in fan
4. 100% full load Burn-In Tested

## 2D LAYOUT

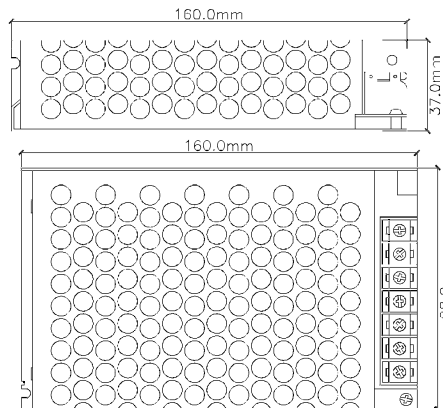

## MECHANICAL FEATURES

PAKING SIZE	WEIGHT	WIRE SIZE	WIRE GAGE	SURGE PROTECTION	BODY MATERIAL	SHORT-CIRCUIT PROTECTION
160 x 100 x 42mm	0.48KG	-	-	Available	Aluminum Extrude	Available



## PRODUCT IMAGE

