

## ELECTRICAL FEATURES

LED CHIP	SMD, CREE
TOTAL LUMEN OUTPUT	1440LM Warm White
DIMMABILITY	NO
POWER	16W
POWER SUPPLY	220 - 240V AC, 50 - 60Hz
BEAM ANGLE	45°
LIFE SPAN	40,000hrs
CRI	>80



## MECHANICAL FEATURES

PACKING SIZE L X W X H	HOLE SIZE	SLEEVE MATERIAL	WEIGHT	PROTECTION	FRAME MATERIAL	DIFFUSER	BODY MATERIAL
210x210x140mm	Ø188xH216mm	ABS	2.8kg	IP67	Stainless Steel 304	Tempered Glass	Die casting Aluminum

## PRODUCT IMAGE





## AVAILABLE COLOR TEMPERATURE



## APPLICATION PHOTO



## 2D LAYOUT

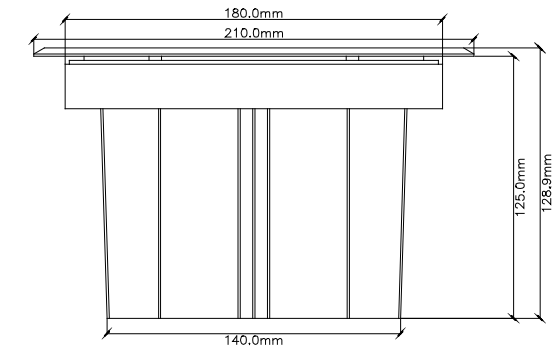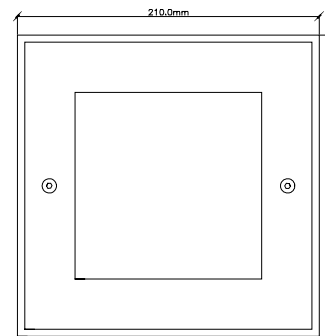

## GENERAL FEATURES

This is a good choice for highlighting outdoor objects such as trees, columns or walls.

Easy installation using an anti-corrosion burial sleeve.

Protected from temporary immersion in water.

# 16W RECESSED INGROUND UPLIGHT