


ELECTRICAL FEATURES

INPUT VOLTAGE	100 - 240V Ac, 50-60HZ
INPUT CURRENT	1.6A Max
POWER RATE	350W
DIMMABILITY	NO
POWER FACTOR	0.97
OUTPUT VOLTAGE	12V Dc
OUTPUT CURRENT	29A Max
WORKING TEMPERATURE	≤ 70°

GENERAL FEATURES

1. Protections:
 - (a) Over voltage protected (OVP)
 - (b) Over temperature protected (OTP)
 - (c) Short-circuit protected (SCP)
 - (d) Input in-rush current protected (ICP)
2. APFC (Active Power Factor Correction): 0.99
3. Thermal Optimized Aluminum case with built-in fan
4. 100% full load Burn-In Tested

2D LAYOUT

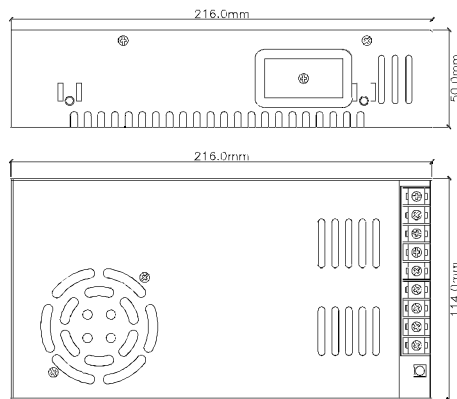

MECHANICAL FEATURES

PAKING SIZE	WEIGHT	WIRE SIZE	WIRE GAGE	SURGE PROTECTION	BODY MATERIAL	SHORT-CIRCUIT PROTECTION
221 x 120 x 55mm	0.88KG	-	-	Available	Aluminum Extrude	Available



PRODUCT IMAGE

