

## ELECTRICAL FEATURES

LED CHIP	CREE LED
TOTAL LUMEN OUTPUT	3000LM Warm White
DIMMABILITY	NO
POWER	30W
POWER SUPPLY	100-240V AC, 50-60Hz
BEAM ANGLE	3.5°   12°   20°   30°   60°   10x 70°   5X20°
LIFE SPAN	>50,000
CRI	>80

## AVAILABLE COLOR TEMPERATURE



## APPLICATION PHOTO




## GENERAL FEATURES

- Unique design with a die casting aluminum bracket for surface mounting.
- Supper energy efficient.
- Micro prismatic diffusion lens for smooth and even light distribution.
- Precision die casting aluminum housing and frame.
- Ideal for all outdoor flood lighting applications.
- 3 years warranty

## MECHANICAL FEATURES

PACKING SIZE L X W X H	INSTALLATION	BRACKET MATERIAL	WEIGHT	PROTECTION	FRAME MATERIAL	DIFFUSER	BODY MATERIAL
230x230x270mm	Surface Mounted	Die casting Aluminum	3.7kg	IP66	Die casting Aluminum	Tempered Glass	Die casting Aluminum

## PRODUCT IMAGE

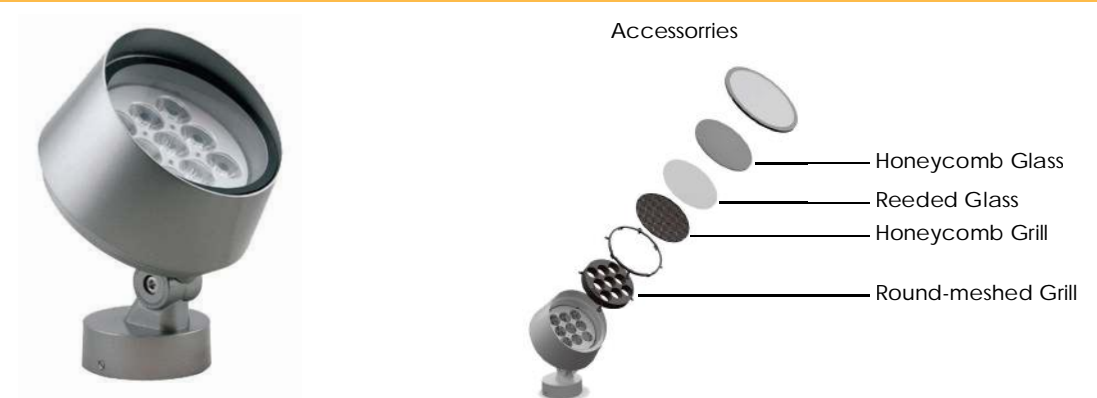

## 2D LAYOUT

