## LUXXXHT-BL01





E	ELECTRICAL F	EATURES		M	
LED CHIP	CREE, SMD				
TOTAL LUMEN OUTPUT	Based on G4 La	amp			
DIMMABILITY	No			111	
POWER	Based on G4 La	amp		CLEAR GLASS	
POWER SUPPLY	12V AC/DC			1m	
BEAM ANGLE	360°			CLASS	
LIFE SPAN	40,000hrs			III	ı
CRI	>80			EEC	
12V low voltage products	need to have an	individual transf	ormer to operate.	A+	l
AVAIL	ABLE COLOR	TEMPERATU	JRE	UL	ı
				IP65	
2700	3000	4000	5000	RoHS	
	APPLICATION	N PHOTO		cUL	
Solid cast brass fixture w	GENERAL FE				
Heavy duty PVC Stake i		OHS.			
Heavy duly F v C stake I	icioaea.				

MECHANICAL FEATURES								
STAKE PACKING SIZE (L X W X H)	HEAD PACKING SIZE (L X W X H)	INSTALLATION	WEIGHT	BODY FINISH	PROTECTION	STAKE MATERIAL	DIFFUSER	BODY MATERIAL
80x80x570mm	178x180x135mm	Spiked in-around	0.93kg	Antique Bronze	IP65	PVC	Clear Glass	Brass

## **PRODUCT IMAGE**

## 2D LAYOUT

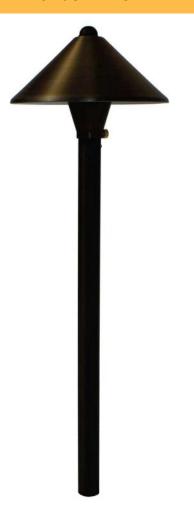

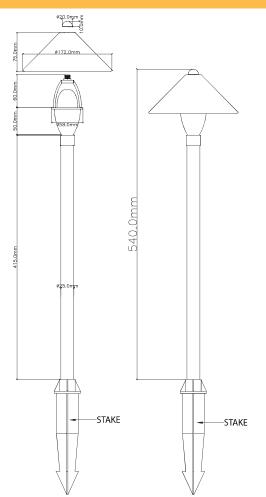

3 years warranty.