

ELECTRICAL FEATURES


LED CHIP	SMD CREE
TOTAL LUMEN OUTPUT	4818lm Warm White
DIMMABILITY	NO
POWER	60W
POWER SUPPLY	100 - 277V AC, 50 - 60Hz
LED QUANTITY	30pcs
LIFE SPAN	>50,000Hrs
CRI	>80

AVAILABLE COLOR TEMPERATURE



GENERAL FEATURES


- Die-cast aluminum body and Anodised aluminum reflector.
- Assembling on pole in 3-6m height with top fitting Ø60mm or 3/4".
- Surface anti-ageing electrostatic spray processing for more reliability.
- super resistance to corrosion, rust and peeling.
- 3 years warranty.



MECHANICAL FEATURES

PACKING SIZE L X W X H	INSTALLATION	REFLECTOR	FIXTURE WEIGHT	PROTECTION	FINISH	DIFFUSER	BODY MATERIAL
445x445x665mm	Pole Mounted	Anodised Aluminum	9kg	IP66	Dark Grey	PMMA	Die- cast aluminum

PRODUCT IMAGE

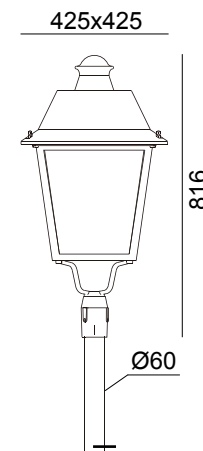

APPLICATION PHOTO

