
# LU060UPL-NS01



#### **OUTDOOR LED URBAN LIGHT**





## **Description**

Our Reflected light streetlamp uses indirect style of lighting distribution to illuminate public spaces, bringing a typically indoor light quality to the urban landscape with an architectural concept. The material of the circular shade is aluminum with white paint finish to maximize the light reflection downward with min glare and tempered glass as cover. The pole is fixed using a concrete cube, with groove for wiring, made on-site and four pole anchor bolts, as per installation instruction (please check the installation sheet) below the pavement surface. The light can be delivered in full installation material (check the accessories and order them separately) pole anchor bolts are included but concrete basement which is a part of civil work is excluded.

## **Correlated Color Temperature (CCT)**

	2700K WW	3000K WW	4000K NW	5000K CW

<sup>\*</sup>Other color temperatures (CCT) can be made as per order.

# **Beam Angle**



#### **Color Finish**

	Grey



Dark Grey



Black



\*Other RAL color can be made as per order.

#### **Electrical Features**

Wattage	60W
Light Source	Cree LED
LED chip Lumen	7200lm
Input Voltage	100-277V AC, 50-60Hz
Operating Temp.	-20°C ~ 60°C
Color Rendering Index	>80
LED Life Span	50,000Hrs
Control	On/Off (Optional DALI)

#### **Mechanical Features**

Installation	Pole installation	
Body Material	Die Cast Aluminum	
Diffuser	Tempered Glass	
Ingress Protection	IP66	

#### **Pole Features**

Body Material	Hot dip galvanized steel cylindrical	
Dimension	As per drawing	
IK Rating	IK10	

# LU060UPL-NS01




## **Accessories**



# Installation



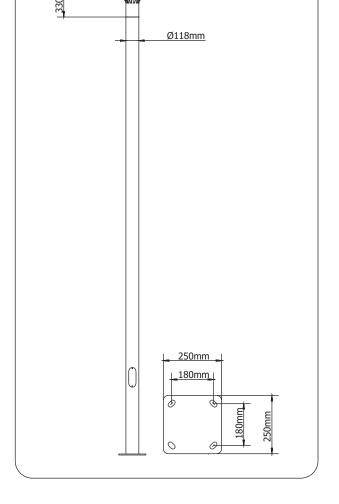

Project: Dubai South, U.A.E