
### STEWAL SERIES - 107109



#### LED RECESSED WALL LIGHT



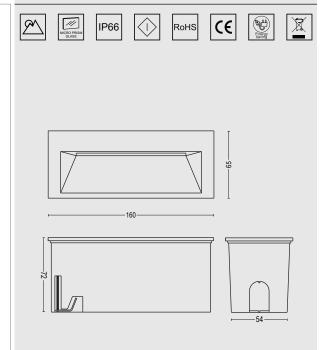

#### **Description**

This Series of outdoor recessed lighting fixtures characterized by either Asymmetrical beam angle or diffused beam spread. Both Available in two sizes, they are designed for lighting stairs, driveways and walkways with indirect light without glaring. The body and is made of high oxidation resistant Die casting aluminum which is subjected to powder coated body protected against UV rays, guaranteeing maximum protection over the years. Silicone gaskets around the light fixture ensure maximum sealing in all operating and humid conditions. The diffuser in micro-prism tempered glass, to assure a uniform distribution of light, is fixed by silicon directly to the body of the light. The product is installed in a rough-in housing made of PVC which is included in each order.

#### **Electrical Features**

Wattage	5W
Light Source	SMD LED
Output Lumen	400lm (3000K)
Input Voltage	220-240V AC
Color Rendering Index	CRI >90
LED Life Span	>50,000Hrs
Control	ON / OFF

### **Correlated Color Temperature (CCT)**



\*Other color temperatures (CCT) can be made as per order.

#### **Mechanical Features**

Installation	Recessed Wall Installation		
Body Material	Die Cast Aluminum		
Diffuser	Micro-prism Glass		
Sleeve Material	PVC (included)		
Ingress Protection	IP66		
Impact Protection	IK 08		
Weight	Net Wt. 0.45 kg		
Dimension	L160 x D72 x H65 mm		

#### **Beam Angle**



#### **Color Finish**



# **STEWAL SERIES - 107109**



#### ORDER INFORMATION

Art. No.	Wattage (W)	Input (V)	Beam Angle	Color Temperature (CCT)	Lumen	Finish
10710932737102	- 5W 22	220-240V AC	Asymmetric	2700K	392lm	Textured Dark Grey
10710933037102				3000K	400lm	
10710934037102		220-240V AC		4000K	416lm	
10710935037102				5000K	433lm	

## **Product Image**





#### **Accessories**





## **Application**

# **Light Distribution**



