

LU054HGWW-BK02



SURFACE MOUNTED LINEAR WALL WASHER LIGHT

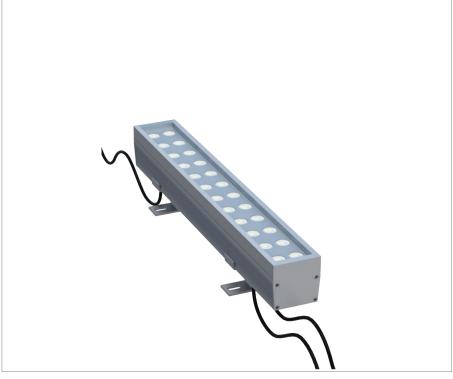



Description

Surface Mounted wall washer light has been made to be used on the floor or grounds very close to the façade of building/sculptures or anywhere else that it needed to be lit with different heights and uniform shapes. The Light can be installed near the walls/columns as a surface-mounted wall grazer (wall washer). With two different asymmetric Beam angles and other narrow/wide optics, this fixture enables you to create the required effects of lighting as per project requirements. Thanks to the new technology of powder coating this luminaire has been treated well with a change to all wall washer surface mounted coat to withstand outdoor applications for a long time for a powder-coat treatment ask our experts to help you. This product is suitable to be used in wet areas but not permanently to be placed underwater (Ingress Protection rate: 66). You have a choice of selecting this light with two-sided cabling for power connections with waterproof connectors (IP68) for an easy connection from both sides (to be ordered separately). This light can be single-color (CCT) but controllable with a DALI system as well as RGBW to be controlled with a master DMX512.

Correlated Color Temperature (CCT)

2700K WW	3000K	WW	4000K NW	5000K CW	R	GB	RGBW
l	•						

*Standard 3000K. Other color temperatures (CCT) can be made as per order.

Beam Angle

5°	12.5	20°	30°	60°	15*30°	10*60°
*Standard 10*60°. Other beam angle can be made as per order.						

Color Finish

Silver	White	Black	Beige
--------	-------	-------	-------

*Standard silver. Other color finish can be made as per order.

Electrical Features

Wattage	54W
Light Source	Cree COB LED
Input Voltage	24V DC
Lumen Output	110lm/Watt
Color Rendering Index	>90
LED Life Span	>80,000Hrs
Control	DALI

*PMW/DMX control methods on RGB / RGBW

Mechanical Features

Installation	Floor / Surface mounted		
Body Material	Die cast Aluminum		
Diffuser	Clear Tempered Glass		
Ingress Protection	IP66		
Dimension	As per drawing		

LU054HGWW-BK02



Accessories












Application

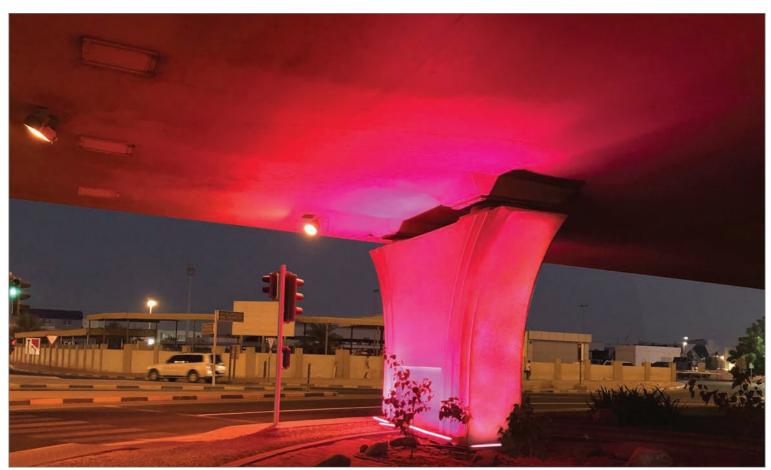

Project Name: Overpass Bridge Lighting , Ajman , UAE