
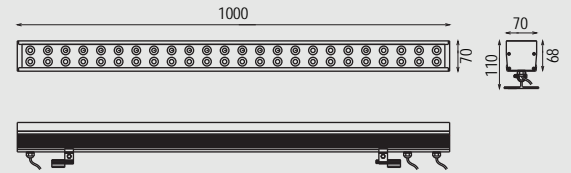



## SURFACE MOUNTED LINEAR WALL WASHER LIGHT

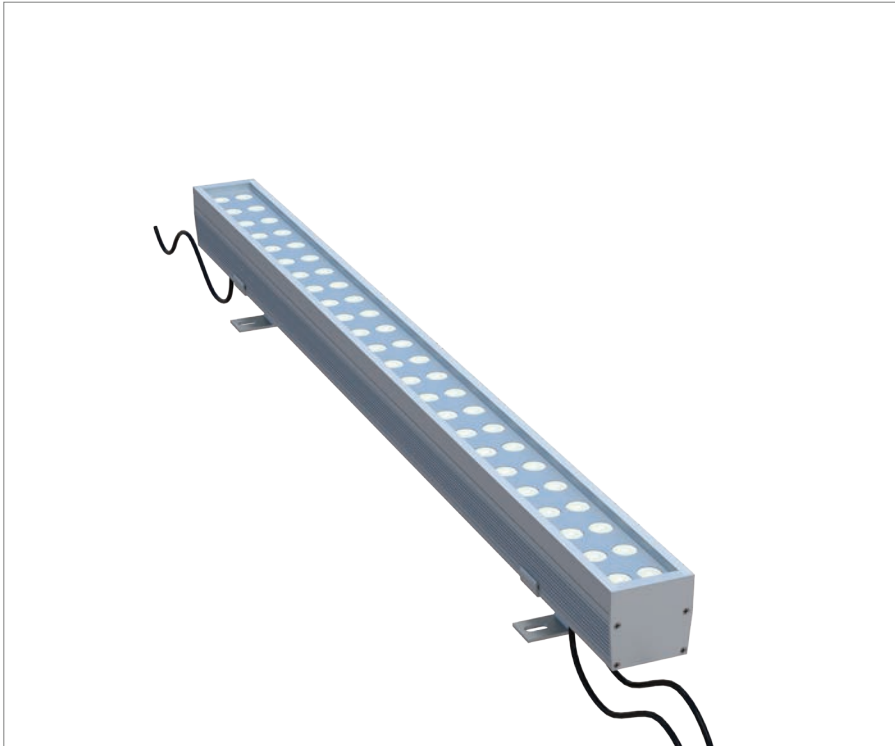

### Description

Surface Mounted wall washer light has been made to be used on the floor or grounds very close to the façade of building/sculptures or anywhere else that it needed to be lit with different heights and uniform shapes. The Light can be installed near the walls/columns as a surface-mounted wall grazer (wall washer). With two different asymmetric Beam angles and other narrow/wide optics, this fixture enables you to create the required effects of lighting as per project requirements. Thanks to the new technology of powder coating this luminaire has been treated well with a change to all wall washer surface mounted coat to withstand outdoor applications for a long time for a powder-coat treatment ask our experts to help you. This product is suitable to be used in wet areas but not permanently to be placed underwater (Ingress Protection rate: 66). You have a choice of selecting this light with two-sided cabling for power connections with waterproof connectors (IP68) for an easy connection from both sides (to be ordered separately). This light can be single-color (CCT) but controllable with a DALI system as well as RGBW to be controlled with a master DMX512.

### Correlated Color Temperature (CCT)



\*Standard 3000K. Other color temperatures (CCT) can be made as per order.

### Beam Angle



\*Standard 10°\*60°. Other beam angle can be made as per order.

### Color Finish



\*Standard silver. Other color finish can be made as per order.

### Electrical Features






<b>Wattage</b>	110W
<b>Light Source</b>	Cree COB LED
<b>Input Voltage</b>	24V DC
<b>Lumen Output</b>	110lm/Watt
<b>Color Rendering Index</b>	>90
<b>LED Life Span</b>	>80,000Hrs
<b>Control</b>	DALI

\*PWM/DMX control methods on RGB / RGBW

### Mechanical Features

<b>Installation</b>	Floor / Surface mounted
<b>Body Material</b>	Die cast Aluminum
<b>Diffuser</b>	Clear Tempered Glass
<b>Ingress Protection</b>	IP66
<b>Dimension</b>	As per drawing

## Accessories

CABLE CONNECTOR	CABLE CONNECTOR	CABLE CONNECTOR	DECODER	LED DRIVER
				
IP68 2 way 3 pin connector <small>Sold Separately</small>	IP68 3 way 3 pin connector <small>Sold Separately</small>	IP68 4 way 3 pin connector <small>Sold Separately</small>	RGBW Decoder <small>Sold Separately</small>	24V LED Driver <small>Sold Separately</small>

## Application



Project Name: Overpass Bridge Lighting , Ajman , UAE