


## OUTDOOR LED CEILING / WALL BULKHEAD LIGHT

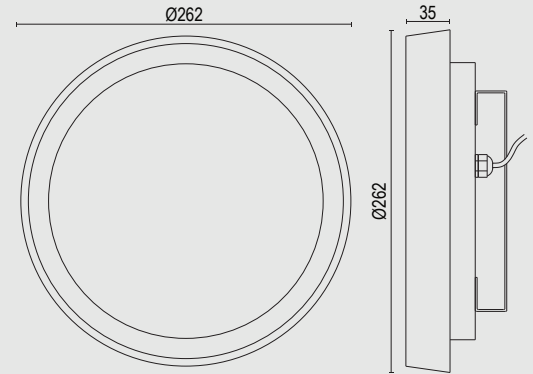

### Description

This round LED bulkhead can be wall-mounted or ceiling mounted. Perfect to be used in corridors, hallways, walkways, stairwell, car park and basements. Rigorously tested to ensure resistance against dust and splashing water, this round LED bulkhead light is ideal for toilets, bathrooms and outdoor spaces. Constructed from tough IK06 opal acrylic for maximum impact resistance. This luminaire is ideal for high traffic areas where security is highly needed. A sleek and modern take on the classic round fitting. Slimmer than similar fittings of this size with a textured grey body and opal acrylic diffuser.

### Correlated Color Temperature (CCT)



\*Other color temperatures (CCT) can be made as per order.

### Beam Angle



### Color Finish



### Electrical Features

<b>Wattage</b>	25W
<b>Light Source</b>	Cree SMD LED
<b>Output Lumen</b>	1750lm (3000K)
<b>Input Voltage</b>	190-265V AC, 50-60Hz
<b>Color Rendering Index</b>	>90
<b>LED Life Span</b>	50,000Hrs
<b>Control</b>	ON/OFF

\*Other control methods can be made as per order


### Mechanical Features

<b>Installation</b>	Wall / Ceiling Mounted
<b>Body Material</b>	Die Cast Aluminum
<b>Diffuser</b>	Opal Acrylic
<b>Ingress Protection</b>	IP65
<b>Impact Protection</b>	IK 06
<b>Dimension</b>	As per drawing

## Product Image



## Luminous Intensity Distribution Diagram

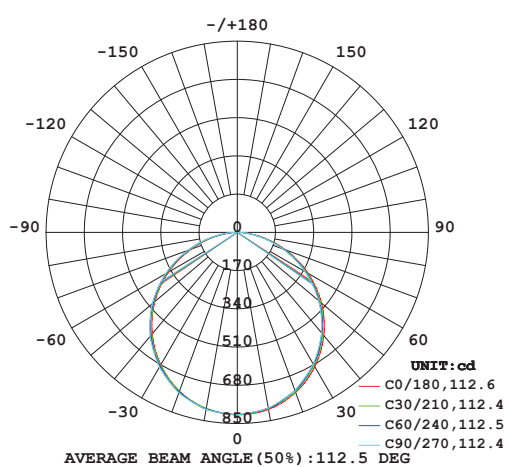

Flux out: 1696 lm

Height	Eavg, Emax	Angle: 112.44deg	Diameter
1m	236.5, 810.7lx		299.00cm
2m	59.12, 202.7lx		598.01cm
3m	26.27, 90.08lx		897.01cm
4m	14.78, 50.67lx		1196.02cm
5m	9.459, 32.43lx		1495.02cm
6m	6.569, 22.52lx		1794.03cm
7m	4.826, 16.54lx		2093.03cm
8m	3.695, 12.67lx		2392.04cm
9m	2.919, 10.01lx		2691.04cm
10m	2.365, 8.107lx		2990.04cm

## Application

