


## SURFACE MOUNTED LINEAR WALL WASHER LIGHT

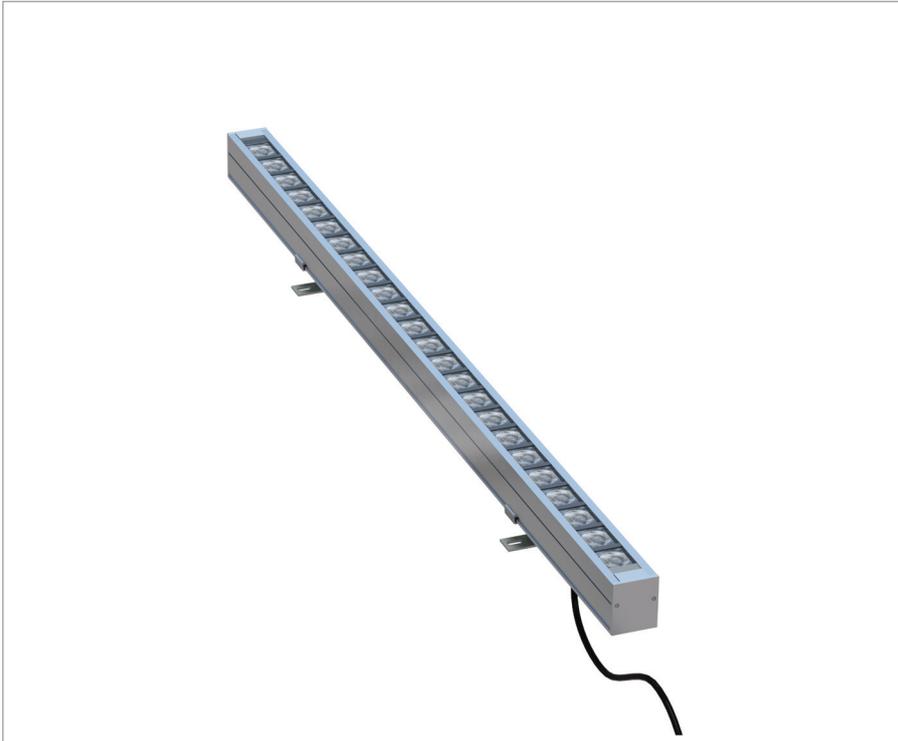

### Description

A slim surface Mounted wall washer light has been made to be used on floor or ground very close to the façade of building/sculptures or anywhere else that it needed to be lit with different heights and uniform shapes. The Light can be installed near the walls/columns as a surface-mounted wall grazer (wall washer). With two different asymmetric Beam angles and other narrow/wide optics, this fixture enables you to create the required effects of lighting as per project requirements. Thanks to the new technology of powder coating this luminaire has been treated well with an electroplating coat to withstand outdoor applications for a long time. This product is suitable to be used in wet areas but not permanently to be placed underwater (Ingress Protection rate: 66). You have a choice of selecting this light with two-sided cabling for power connections with waterproof connectors (IP68) for an easy connection from both sides (to be ordered separately). This light can be single-color (CCT) but controllable with a DALI system as well as RGBW to be controlled with a master DMX512.

### Correlated Color Temperature (CCT)



\*Standard 3000K. Other color temperatures (CCT) can be made as per order.

### Beam Angle




\*Standard 10\*60°. Other beam angle can be made as per order.

### Color Finish



\*Standard silver. Other color finish can be made as per order.



### Electrical Features

<b>Wattage</b>	11W
<b>Light Source</b>	Cree LED
<b>Output Lumen</b>	80lm/Watt
<b>Input Voltage</b>	24V DC
<b>Color Rendering Index</b>	>90
<b>LED Life Span</b>	>80,000Hrs
<b>Control</b>	DALI

\*PWM/DMX control methods on RGB / RGBW


### Mechanical Features

<b>Installation</b>	Floor / wall surface mounted
<b>Body Material</b>	Aluminum
<b>Bracket Material</b>	Aluminum
<b>Diffuser</b>	Tempered Glass
<b>Ingress Protection</b>	IP66
<b>Dimension</b>	As per drawing

## Accessories

CABLE CONNECTOR	CABLE CONNECTOR	CABLE CONNECTOR	DECODER	LED DRIVER
IP68 2 way 3 pin connector Sold Separately	IP68 3 way 3 pin connector Sold Separately	IP68 4 way 3 pin connector Sold Separately	RGBW Decoder Sold Separately	24V LED Driver Sold Separately

## Application

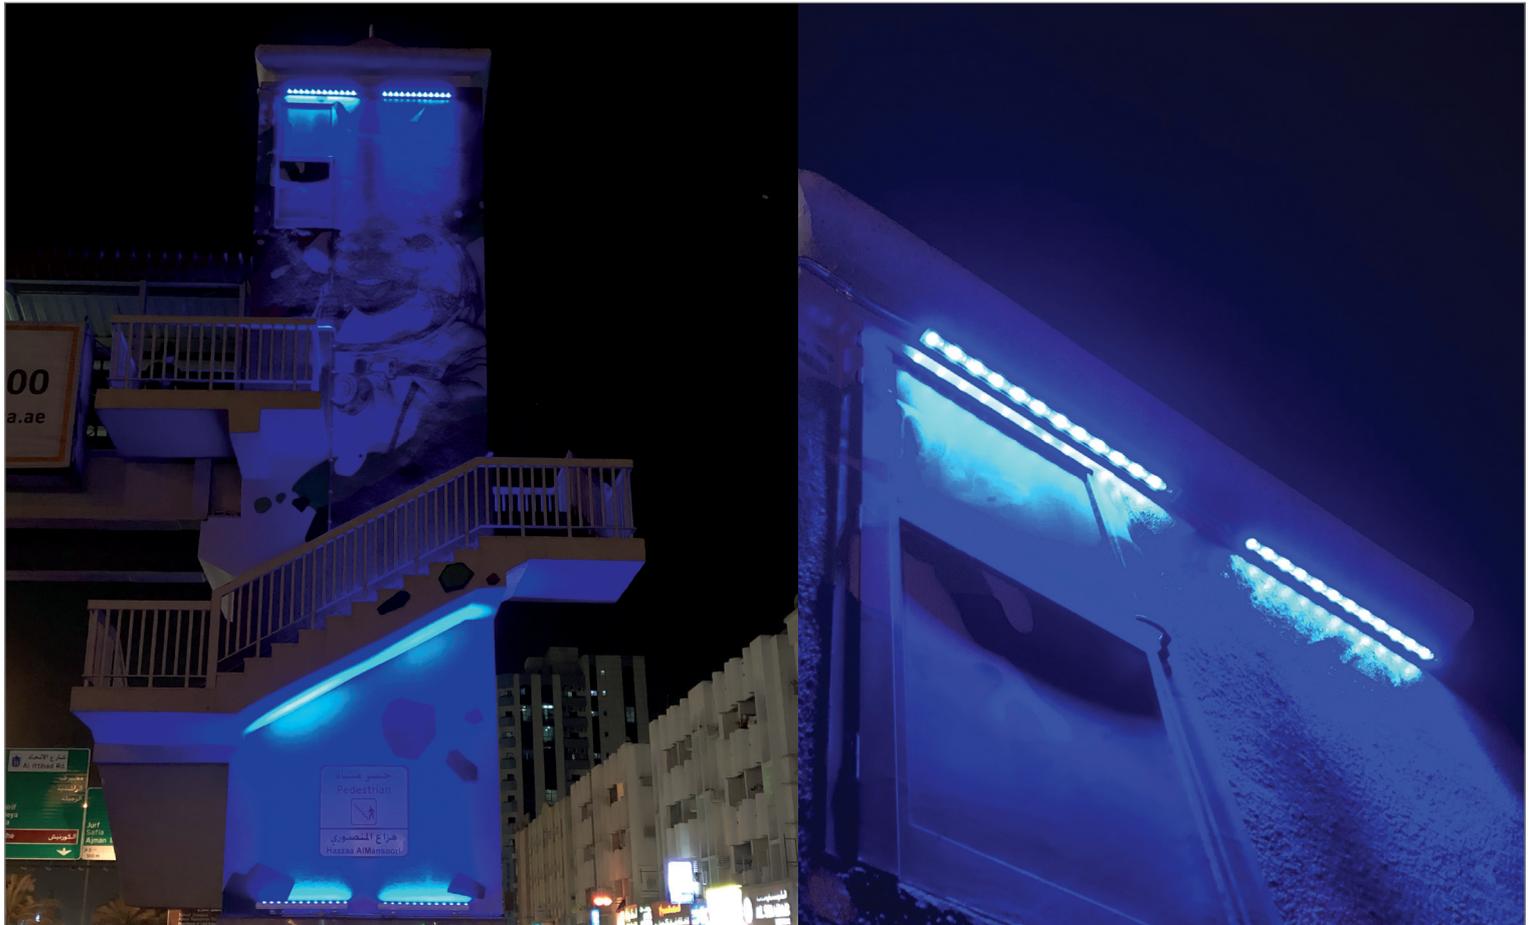

Project Name: Hazzaa Almansoori pedestrian, Ajman, UAE